

????

????a????????????????????????????????????????????????????????

1

DM

新建数据库连接

数据库连接信息

常规高级

主机名(H):

LOCALHOST

端口(P):

5236

验证方式(A):

达梦服务器验证

达梦服务器验证

KERBEROS验证

LDAP验证

操作系统验证

用户名(U):

口令(W):

保存口令(S)

生产环境(Q)

注册信息

连接名(N):

连接组(B):

未分组

描述(D):

?

测试

保存

连接

取消

2


```
SELECT USERNAME FROM DBA_USERS;
```

已用时间: 1.332(毫秒). 执行号:8802.

Diagram illustrating the structure of a SQL Server master database file. The diagram shows a series of blocks representing different system tables and metadata. The first block is labeled 'SYSDBA' and contains 'password' and 'NULL'. The second block is labeled 'SYSDBA' and contains 'Dlsql.exe'. The third block is labeled 'SYSDBA' and contains 'SYSDBA'. The fourth block is labeled 'SYSDBA' and contains 'SYSDBA'. The fifth block is labeled 'SYSDBA' and contains 'SYSDBA'.

已用时间: 20.497(毫秒). 执行号:8803.

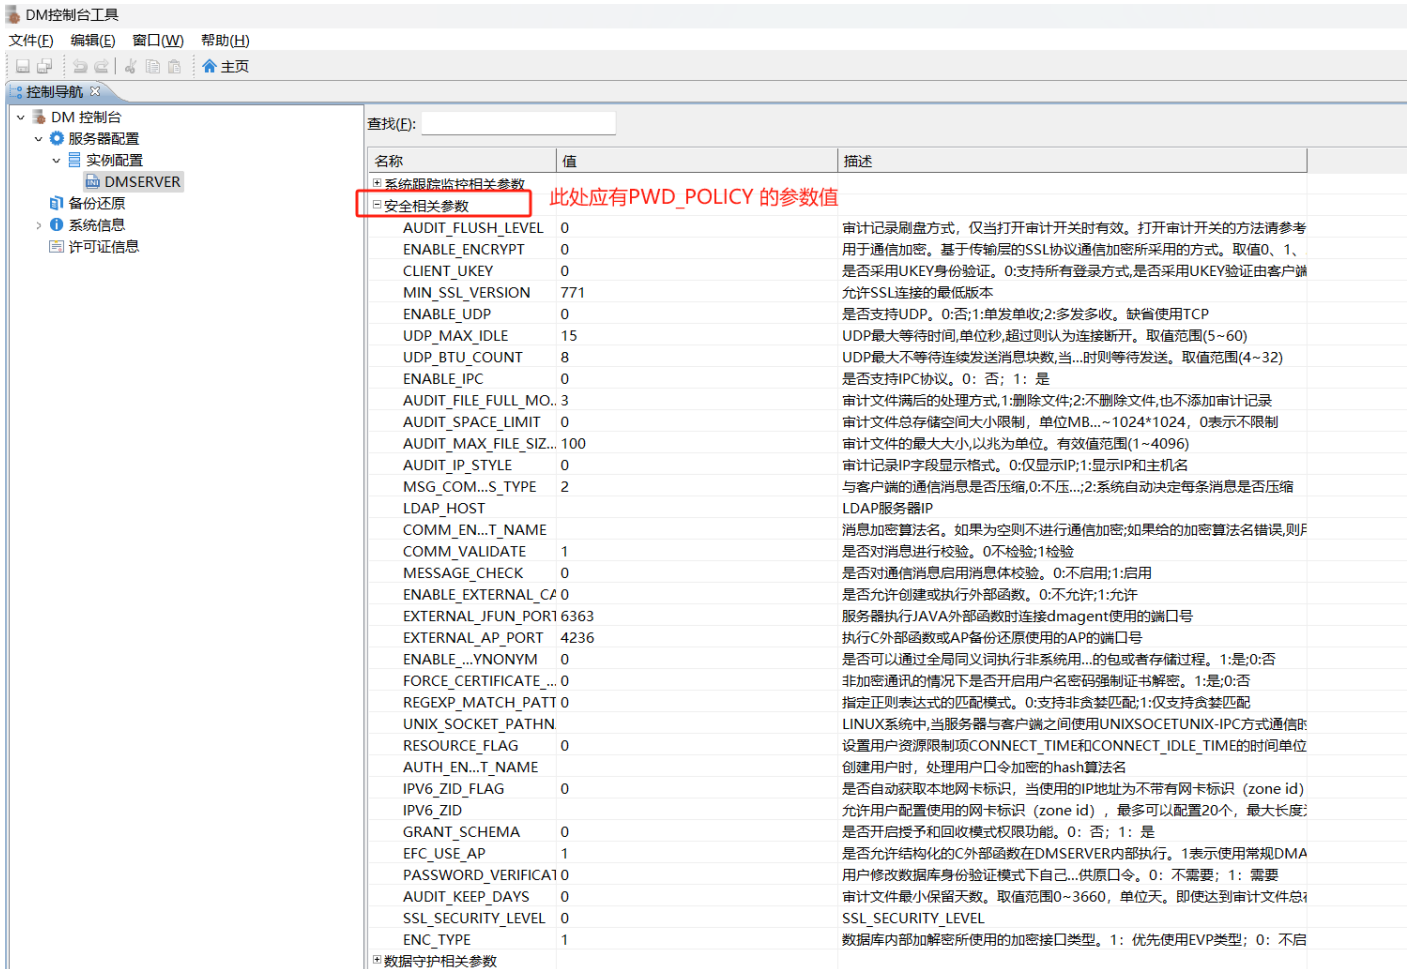

30   





```
SQL> SELECT PROFILE, RESOURCE_NAME, LIMIT
2 FROM DBA_PROFILES
3 WHERE RESOURCE_NAME IN ( 'CONNECT_TIME', 'CONNECT_IDLE_TIME' );
```

| 行号 | PROFILE | RESOURCE_NAME     | LIMIT     |
|----|---------|-------------------|-----------|
| 1  | DEFAULT | CONNECT_TIME      | UNLIMITED |
| 2  | DEFAULT | CONNECT_IDLE_TIME | UNLIMITED |

已用时间: 0.530(毫秒). 执行号:9603.

```
“ [REDACTED]
----- [REDACTED]
SELECT * FROM V$PARAMETER WHERE NAME = 'SQLNET_EXPIRE_TIME';

-- [REDACTED]
SELECT * FROM V$PARAMETER WHERE NAME = 'IDLE_TIME';
```

????c????????????????????????????????????????

```
“ DM [REDACTED] SSL
[REDACTED]
[REDACTED]

[REDACTED] https://eco.dameng.com/document/dm/zh-cn/pm/communication-
encryption.html
```

????d
????????????????????????????????????????????????????????????
??????

[REDACTED]