



```
select Host,Db,User,Insert_priv,Delete_priv,Alter_priv,Drop_priv,Grant_priv from mysql.db;
```

Host	Db	User	Insert_priv	Delete_priv	Alter_priv	Drop_priv	Grant_priv
127.0.0.1	demo1	demo1	Y	Y	Y	Y	N
localhost	demo1	demo1	Y	Y	Y	Y	N
localhost	demo2	demo2	Y	Y	Y	Y	N
localhost	performance_schema	mysql.session	N	N	N	N	N
localhost	sys	mysql.sys	N	N	N	N	N

安全管理

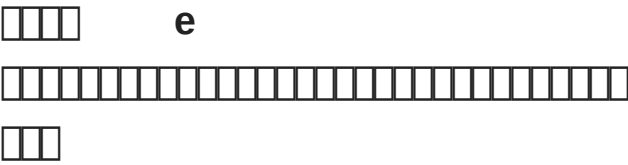

mysql.role_edges

information_schema.user_privileges

role_edges

root

```
-- show grants for 'root'@'root';  
SELECT * FROM `role_edges`;  
SELECT * FROM `USER_PRIVILEGES`;
```

FROM_HOST	FROM_USER	TO_HOST	TO_USER	WITH_ADMIN_OPTION
▶ (N/A)	(N/A)	(N/A)	(N/A)	(N/A)
GRANTEE	TABLE_CATALOG	PRIVILEGE_TYPE	IS_GRANTABLE	
'root'@'localhost'	def	CREATE VIEW	YES	
'root'@'localhost'	def	SHOW VIEW	YES	
'root'@'localhost'	def	CREATE ROUTINE	YES	
'root'@'localhost'	def	ALTER ROUTINE	YES	
'root'@'localhost'	def	CREATE USER	YES	
'root'@'localhost'	def	EVENT	YES	
'root'@'localhost'	def	TRIGGER	YES	
'root'@'localhost'	def	CREATE TABLESPACE	YES	
'root'@'localhost'	def	CREATE ROLE	YES	
'root'@'localhost'	def	DROP ROLE	YES	
'root'@'localhost'	def	XA_RECOVER_ADMIN	YES	
'root'@'localhost'	def	TABLE_ENCRYPTION_AD	YES	
'root'@'localhost'	def	SYSTEM_VARIABLES_AD	YES	
'root'@'localhost'	def	SYSTEM_USER	YES	
'root'@'localhost'	def	SHOW_ROUTINE	YES	
'root'@'localhost'	def	SET_USER_ID	YES	
'root'@'localhost'	def	SESSION_VARIABLES_AD	YES	
'root'@'localhost'	def	SERVICE_CONNECTION_	YES	
'root'@'localhost'	def	ROLE_ADMIN	YES	
'root'@'localhost'	def	RESOURCE_GROUP_USE	YES	
'root'@'localhost'	def	RESOURCE_GROUP_ADM	YES	
'root'@'localhost'	def	REPLICATION_SLAVE_AD	YES	
'root'@'localhost'	def	REPLICATION_APPLIER	YES	
'root'@'localhost'	def	PERSIST_RO_VARIABLES	YES	
'root'@'localhost'	def	INNODB_REDO_LOG_EN	YES	
'root'@'localhost'	def	INNODB_REDO_LOG_AR	YES	
'root'@'localhost'	def	GROUP_REPLICATION_A	YES	
'root'@'localhost'	def	FLUSH_USER_RESOURCE	YES	
'root'@'localhost'	def	FLUSH_TABLES	YES	
'root'@'localhost'	def	FLUSH_STATUS	YES	
'root'@'localhost'	def	FLUSH_OPTIMIZER_COS	YES	
'root'@'localhost'	def	ENCRYPTION_KEY_ADMI	YES	
'root'@'localhost'	def	CONNECTION_ADMIN	YES	
'root'@'localhost'	def	CLONE_ADMIN	YES	
'root'@'localhost'	def	BINLOG_ENCRYPTION_A	YES	
'root'@'localhost'	def	BINLOG_ADMIN	YES	
'root'@'localhost'	def	BACKUP_ADMIN	YES	
'root'@'localhost'	def	AUDIT_ADMIN	YES	
'root'@'localhost'	def	APPLICATION_PASSWOI	YES	
▶ 'secure_user'@'%'	def	USAGE	NO	



f



g



MySQL